

Installation Details

Refer to the Crisp handling and installation guide for in-depth instructions.

Please add an overage of 12-15%. This allows for greater flexibility during the evaluation process on-site to ensure the best outcome.

Crisp Pine can be installed vertically or horizontally

Finish Specifications

All products are factory-finished and arrive on-site ready for installation

• **Pre-finish:** Crisp Pine features a two-coat system.

- First conditioning, clear coat is applied to front face, back and two edges.

- The second is a color coat that is applied to the front-finished face.

• **Applied Finish:** Broda Clarity Acrylic, Water-borne, low V.O.C, film-building finish.

- Color: Broda Clarity 215 Light Oak
- Coating Options:

- Broda Clarity acrylic clear top coat, available in gloss, satin or flat finish.

Species

Pine (SPF spruce-pine-fir) is a versatile and sustainable option for wood cladding projects. Renowned for its natural beauty, strength, and adaptability, pine is a popular choice among architects and designers. With its distinct grain pattern and warm color, pine adds a touch of elegance to any space. Whether stained or left natural, pine complements various architectural styles, making it a timeless and versatile option for any space.

Wood Grade

Crisp Pine is available in:

- C&BTR Clear Select 6'-16' even lengths, available in specified tally.

Elite (Premium #2) 6'-16' even lengths, available in specified tally.
*Product pictures of Pine on crisp wood co website features
Elite (Premium #2) unless noted*

Moisture Content

Crisp Pine is kiln-dried to a MC of 12-15%. This may fluctuate during transportation or warehousing.


Make sure to acclimatize on-site before installation.

Surface and Texture

Crisp Pine smooth is pre-sanded to a smooth finish.

• Profiles & Dimmensions

The profiles shown are standard dimensions. Crisp can supply any custom profile

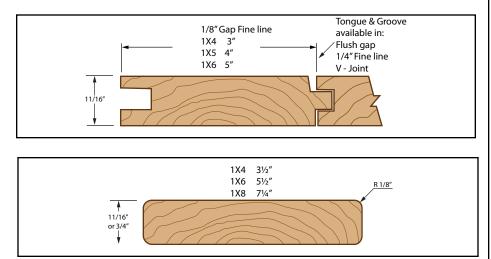

Manufactured by: Crisp Wood co.; 876 Cordova Diversion Vancouver, BC, V6A 3R3, CANADA 604 254-3325, 1-888-311-5339